

06-21-04

IFW

Please type a plus sign (+) inside this box →



PTO/SB/21 (05-03)

Approved for use through 04/30/2003. OMB 0651-0031

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

TRANSMITTAL FORM (to be used for all correspondence after initial filing)		Application Number	10/666,005
		Filing Date	September 17, 2003
		First Named Inventor	FAYLE, THOMAS WALKER CLARKE
		Group Art Unit	3765
		Examiner Name	JOEY, ALISSA L.
Total Number of Pages in This Submission	1	Attorney Docket Number	SMAR-018DIV
ENCLOSURES (check all that apply)			
<input type="checkbox"/> Fee Transmittal Form <input type="checkbox"/> Fee Attached <input type="checkbox"/> Amendment / Reply <input type="checkbox"/> After Final <input type="checkbox"/> Affidavits/declaration(s) <input type="checkbox"/> Extension of Time Request <input type="checkbox"/> Express Abandonment Request <input type="checkbox"/> Information Disclosure Statement <input checked="" type="checkbox"/> Certified Copy of Priority Documents <input type="checkbox"/> Response to Missing Parts/Incomplete Application <input type="checkbox"/> Response to Missing Parts under 37 CFR 1.52 or 1.53	<input type="checkbox"/> Assignment Papers (for an Application) <input type="checkbox"/> Drawing(s) <input type="checkbox"/> Licensing-related Papers <input type="checkbox"/> Petition <input type="checkbox"/> Petition to Convert to a Provisional Application <input type="checkbox"/> Power of Attorney, Revocation Change of Correspondence Address <input type="checkbox"/> Terminal Disclaimer <input type="checkbox"/> Request for Refund <input type="checkbox"/> CD, Number of CD(s)	<input type="checkbox"/> After Allowance Communication to Group <input type="checkbox"/> Appeal Communication to Board of Appeals and Interferences <input type="checkbox"/> Appeal Communication to Group (Appeal Notice, Brief, Reply Brief) <input type="checkbox"/> Proprietary Information <input type="checkbox"/> Status Letter <input checked="" type="checkbox"/> Other Enclosure(s) (please identify below): Postcard	Remarks
SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT			
Signing Attorney/Agent (Reg. No.)	BRET E. FIELD, 37,620 BOZICEVIC, FIELD & FRANCIS LLP		
Signature			
Date	June 17, 2004		

EXPRESS MAIL LABEL NO. EV333997445US

This collection of information is required by 37 CFR 1.5. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.



Office de la propriété
intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An Agency of
Industry Canada

*Bureau canadien
des brevets
Certification*

*Canadian Patent
Office
Certification*

La présente atteste que les documents
ci-joints, dont la liste figure ci-dessous,
sont des copies authentiques des docu-
ments déposés au Bureau des brevets.

This is to certify that the documents
attached hereto and identified below are
true copies of the documents on file in
the Patent Office.

Specification and Drawings, as originally filed, with Application for Patent Serial No:
2,332,201, on January 24, 2001, by **ARC TERYX EQUIPMENT INC.**, assignee of
Thomas Fayle, Clarke Walker and Thomas R. Routh, for "Outdoor Jacket".

Tracy Routh
Agent/certificateur/Certifying Officer

June 8, 2004

Date

Canada

(CIPO 68)
04-09-02

OPIC  CIPO

ABSTRACT

In one aspect, the invention provides a hood drawstring arrangement that may be adapted to allow a single adjustment to exert tension along the vertical sides of the front face opening of the hood, which will tend to vertically compress the hood, as well as simultaneously exerting a circumferential tensioning of the top portion of the hood.

OUTDOOR JACKET

FIELD OF THE INVENTION

The invention is in the field of garments, particularly outdoor garments.

5

BACKGROUND OF THE INVENTION

Jackets often have hoods, to provide a covering for the top the head while leaving an opening for the face. A wide variety of inventive hood adjustment mechanisms are known, as for example are disclosed in U.S. Patent Nos. 6,088,838; 6,023,787; 5,369,809; 4,334,325; 10 2,581,366; and, 2,567,192. Multiple drawstrings have for example often been used to provide vertical and horizontal adjustments on jacket hoods. In many cases, one drawstring on each side of the hood affords vertical adjustment on either side of the face opening, along the temporal portions of the hood. There may also be a rear drawstring which affords adjustment of the position of the brim by lengthening or shortening the arc of the hood along the mid-line from the 15 shoulders to the forehead. In some cases, a drawstring may also be provided to tension the hood circumferentially against the top portion of the skull (the cranium), in a manner analogous to a hat band adjustment. There remains a need for alternative mechanisms of adjusting the fit of a hooded garment to a wearer's head.

20 Many outdoor jackets include relatively high collars, which may reach up above the chin of a person wearing the jacket. As a result, the slide fastener, such as a zipper, which typically runs up the front midline of the jacket may be brought into uncomfortable contact with the person's chin or lips. This may be particularly problematic in weather that is sufficiently cold to make skin contact with a metal zipper slider potentially harmful.

25

SUMMARY OF THE INVENTION

In one aspect, the invention provides a hood drawstring arrangement that may be adapted to allow a single adjustment to exert tension along the vertical sides of the front face opening of the hood, which will tend to vertically compress the hood, as well as 30 simultaneously exerting a circumferential tensioning of the top portion of the hood, which will tend to contract the hood across the forehead and around the back of the wearer's head (tensioning the cranial portion of the hood). The drawstring arrangement may be adapted to exert these tensioning forces while leaving the brim of the hood free to protrude above the face opening.

In one aspect, the invention provides a hood having a head covering and a face opening. The hood may include an adjustable drawstring arrangement providing for simultaneous circumferential tensioning of the head covering and vertical temporal tensioning of the face opening. The drawstring arrangement may include one or more cranial cord segments encircling the head covering, connected to left and right temporal cord segments on each lateral side of the face opening. The cord segments may co-operate so that manual tensioning of the cranial cord segment(s) acts to tension the temporal cord segments; or, manual tensioning of either the left or right temporal cord segment acts to tension the cranial cord segment(s). The cranial cord segments may be generally horizontal, and the temporal cord segments may be generally vertical. The cord segments may be elasticated, and may form a drawstring that runs in channels or passageways formed in the hood material. The hood may include a brim that has an inner cranial cord segment flexibly connected to an outer brim reinforcing member, so that the inner cord segment can assist in securing the hood to the wearer's head while the brim reinforcing member helps to preserve the shape of the brim.

In an alternative aspect, the invention provides a jacket adapted to cover a person's chest and having a collar adapted to cover a person's neck, in which a front opening of the jacket is closable with a curved slide fastener, such as a zipper. The slide fastener may be disposed vertically along the anterior midline of the jacket over the chest, and then curve laterally so that the slide fastener is offset from the anterior midline of the collar. This arrangement may avoid positioning the slider of the slide fastener over the wearer's mouth when the fastener is in a closed position with the slider at the top of the fastener. In some embodiments, the curved slide fastener may be coated with a resilient polymeric compound such as a thermoplastic polymer, which may assist in achieving the curved conformation of the fastener. The polymeric coating may help to make the slide fastener water resistant.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a front view of a jacket of the invention, with stippling to show the overall shape, configuration and design of the jacket, illustrating the curved slide fastener on the front opening of the jacket and the absence of draw strings around the face opening of the hood.

Figure 2 is a rear view of a jacket of the invention, with stippling to show the overall shape, configuration and design of the jacket, illustrating the drawstring and cord lock at the rear of the hood.

5 Figure 3 is a right side view of a jacket of the invention, with stippling to show the overall shape, configuration and design of the jacket, illustrating the curvature of the right arm, the elongated rear hem, and the protruding brim of the hood.

10 Figure 4 is a left side view of a jacket, with stippling to show the overall shape, configuration and design of the jacket, illustrating the curvature of the left arm, the left shoulder pocket with window and adjacent slide fastener, the elongated rear hem, and the protruding brim of the hood.

15 Figure 5 is a top view of a jacket, with stippling to show the overall shape, configuration and design of the jacket, illustrating the drawstring and cord lock at the rear of the hood and the windowed left shoulder pocket.

20 Figure 6 is a bottom view of a jacket, with stippling to show the overall shape, configuration and design of the jacket, illustrating the armpit slide fasteners on the underside of the arms.

25 Figure 7 is a front view of a jacket of the invention with dashed lines illustrating the drawstring passageways around the face opening and the internal boundary of the left shoulder pocket.

 Figure 8 is a rear view of a jacket of the invention with dashed lines illustrating the circumferential cranial drawstring passageways in the hood, the drawstring passageway in the hem, and the extent of the expanded left shoulder pocket.

30 Figure 9 is a right side view of a jacket of the invention with dashed lines illustrating the drawstring cord passageway from the rear of the hood, along the right side of the hood and then down along the right edge of the face opening, with an arrow showing the direction of hood drawstring tensioning movement.

Figure 10 is a left side view of a jacket of the invention with dashed lines illustrating the drawstring cord passageway from the rear of the hood, along the left side of the hood and then down along the left edge of the face opening, with an arrow showing the direction of hood drawstring tensioning movement, and with dashed lines showing the internal outline of the left shoulder pocket.

Figure 11 is a top view of a jacket, illustrating the hood drawstring passageways in dashed outline.

Figure 12 is a bottom view of a jacket illustrating the hem drawstring passageway the hem cord lock.

Figure 13 is a left side view of the hood, showing the drawstring passageways, with an arrow in front showing the notional vertical tensioning force that may be applied by manipulation of the drawstring at the rear of the hood in the direction of the arrow shown at the rear of the hood.

Figure 14 is a side view of the hem drawstring cord lock, showing the loop formed by the hem drawstring.

Figure 15 is a cross-sectional view of the hem drawstring cord lock.

Figures 16A, 16B and 16C show sequential steps in a method of the invention for making a curved slide fastener.

DETAILED DESCRIPTION OF THE INVENTION

Figures 1 through 6 illustrate the overall shape, configuration and design of jacket 20, having hood 24 attached to upper body portion 22 which may include collar 64. Underarm slide fasteners 50 may be provided for ventilation, and breast pocket slide fasteners 48 may provide access to pocket storage space in the front of jacket 20. Sleeves 39 may be provided with surface fasteners 40, such as VELCRO (TM) brand fasteners, at the cuffs. A front slide

fastener **34** may provide an opening on the front of the jacket, which may be curved. Collar **64** and hood **24** together define face opening **72**.

Jacket **20** may be made out of a wide range of materials, such as natural fibres and/or
 5 synthetic materials. In some embodiments, the jacket may be made of a waterproof breathable laminate such as expanded porous polytetrafluoroethylene coated with a breathable fabric, as is well known in the art of technical outdoor garments.

The adjustable drawstring arrangement of hood **24** may include one or more cranial
 10 cord segments adapted to be positionable to encircle the cranial portion of a wearer's head. As shown in Figures **8**, **9**, **10** and **13**, a rear cranial cord segment **54** may run along each side of hood **24** from rear draw string cord lock **44**, into rear hood opening **41** and through internal rear drawstring passageway **38** to an interconnection with a front cranial cord segment **30**. Cord locks may for example be constructed as disclosed in U.S. Patent No. 4,453,292
 15 (incorporated herein by reference) or in accordance with the wide variety of alternative cord locks known in the outdoor garment art. As illustrated, front cranial cord segment **30** may run through a passageway defined by flexible brim connector **60**, shown in Figure **13**, and pass through side openings **31** into the internal hood cord passageway **38**, **28** (through which run drawstring cord segments **54** and **62** respectively, which are unitary segments in the illustrated
 20 embodiment).

In the illustrated embodiment, front cranial cord segment **30** forms loop **33** after passing through side openings **31**, and unitary drawstring **54**, **62** passes through loop **33** to form the connection between drawstring **54**, **62** and front cranial cord segment **30**. As
 25 alternatives to loop **33**, other means may be provided for connecting draw string segments, such as stitches and glue. A brim stiffening member **58** may be flexibly connected to front cranial cord segment **30**, to help stiffen and shape brim **42**. In this arrangement, front cranial cord segment **30** may be tightened against a persons head without unduly flattening brim **42**. Manual tensioning by pulling on drawstring **54**, **62** at toggle **45** in the direction of the arrow
 30 shown in Figure **13** acts to tighten the circumferential cranial cord segments, **54** and **30**, as well as tensioning temporal cord segments **62**. Similarly, in an embodiment that is not illustrated, cord segments may be arranged so that manual tensioning of either a left or right temporal cord segment **62** may act to tension the circumferential cranial cord segments **30**, **54**.

In this way, the adjustable hood drawstring arrangement of the invention provides a variety of embodiments adapted for simultaneous circumferential tensioning of the cranial covering portion of hood 24 as well as vertical temporal tensioning of hood 24 along the lateral margins of face opening 72. In some embodiments, cranial cord segments 30, 54 may be generally horizontal and temporal cord segments 62 may be generally vertical.

It will be seen that cord arrangements other than the illustrated embodiment may be adapted to provide the desired result. For example, toggle 45 and cord lock 44 need not be located at the rear of hood 24. Alternative embodiments may have a toggle and cord lock arranged, for example, near the collar at the bottom end of one or both of the vertical channels 28. More than one toggle and cord lock may be provided for manual operation of the one or more interconnected cord segments. In the illustrated embodiment, the base of each temporal cord segment 62 is anchored (for example by adhesive or by stitching) in passageway 28 at a location 63 that is near the junction 65 between hood 24 and collar 64.

15

In various aspects of the invention, drawstrings may be elasticated cords, and the drawstrings may run in channels or passageways formed in the hood material, formed for example by adhesive application of channel strips to the interior of the hood, or by sewn channels or guides applied to the inside of hood 24.

20

In alternative aspects, the invention provides methods of producing a curved slide fastener, such as a zipper. As shown in Figure 16A, a straight zipper 33 may be fitted, coil down, into a curved fixture or template 70. A backing may be applied to the zipper, such as a resiliently flexible polymeric material, such as a thermoplastic polymer (e.g. polyurethane). The backing thus applied may provide a resiliently flexible curved conformation to the slide fastener. For example, the zipper in the template with a thermoplastic polymer backing may be subjected to heat and light pressure (such as 330°F for 20 seconds) sufficient to attach the backing to the fastener, and then cooled rapidly (for example during a 10 second period) with light pressure being applied, to fix the backing to the fastener. In this way, a resiliently flexible polymeric backing may for example be applied to the tape portion of a zipper (the portion of the zipper attached to the interdigitating elements). The nature of the treatment will vary with the selected backing and fastener material. Following such a heat treatment, zipper 34 may be removed from the template, while retaining its curved configuration. As an

30

additional aspect of the invention, the zipper is made water resistant by the polymeric backing. The use of a polymeric backing to provide water resistance in straight zippers is, however, known.

5 In an alternative aspect, the invention provides a windowed shoulder pocket **32** having a slide fastener **46** closure adjacent to window **52**. Window **52** may be at least partly transparent so that the interior of the shoulder pocket is visible through the window. Shoulder pocket **32** may for example be shaped to receive a radio, having an elongated upper portion shaped to receive an antenna.

10

 Although various embodiments of the invention are disclosed herein, many adaptations and modifications may be made within the scope of the invention in accordance with the common general knowledge of those skilled in this art. Such modifications include the substitution of known equivalents for any aspect of the invention in order to achieve the same
15 result in substantially the same way. Numeric ranges are inclusive of the numbers defining the range. In the specification, the word "comprising" is used as an open-ended term, substantially equivalent to the phrase "including, but not limited to", and the word "comprises" has a corresponding meaning. Citation of references herein shall not be construed as an admission that such references are prior art to the present invention. All publications, including but not
20 limited to patents and patent applications, cited in this specification are incorporated herein by reference as if each individual publication were specifically and individually indicated to be incorporated by reference herein and as though fully set forth herein. The invention includes all embodiments and variations substantially as hereinbefore described and with reference to the examples and drawings.

WHAT IS CLAIMED IS:

1. A hood having a head covering and a face opening, the hood comprising an adjustable drawstring arrangement providing for simultaneous circumferential tensioning of the head covering and vertical temporal tensioning of the face opening, wherein the drawstring arrangement comprises one or more cranial cord segments encircling the head covering connected to left and right temporal cord segments on each lateral side of the face opening, so that:
 - (a) manual tensioning of the cranial cord segment acts to tension the temporal cord segments; or,
 - (b) manual tensioning of either the left or right temporal cord segment acts to tension a cranial cord segment.
2. The hood of claim 1 wherein the cranial cord segments are generally horizontal and temporal cord segments are generally vertical.
3. The hood of claim 1 wherein the wherein at least one of the cord segments is elasticated.
4. The hood of claim 1 wherein the hood comprises a material and the drawstring runs in a channel formed in the material.
5. The hood of claim 1 wherein the hood further comprises a brim, and the brim comprises an inner cranial cord segment flexibly connected to an outer brim reinforcing member.
6. A jacket comprising the hood of claim 1.
7. A jacket adapted to cover a person's chest having a collar adapted to cover a persons neck, wherein a front opening of the jacket is closable with a curved slide fastener is disposed vertically along the anterior midline of the jacket and the slide fastener curves laterally so that the slide fastener is offset from the anterior midline of the collar.

8. The jacket of claim 7, wherein the curved slide fastener is coated with a thermoplastic polymer.
9. The jacket of claim 7 or 8 further comprising a windowed shoulder pocket.
10. A hood substantially as hereinbefore described and with reference to the examples and drawings.

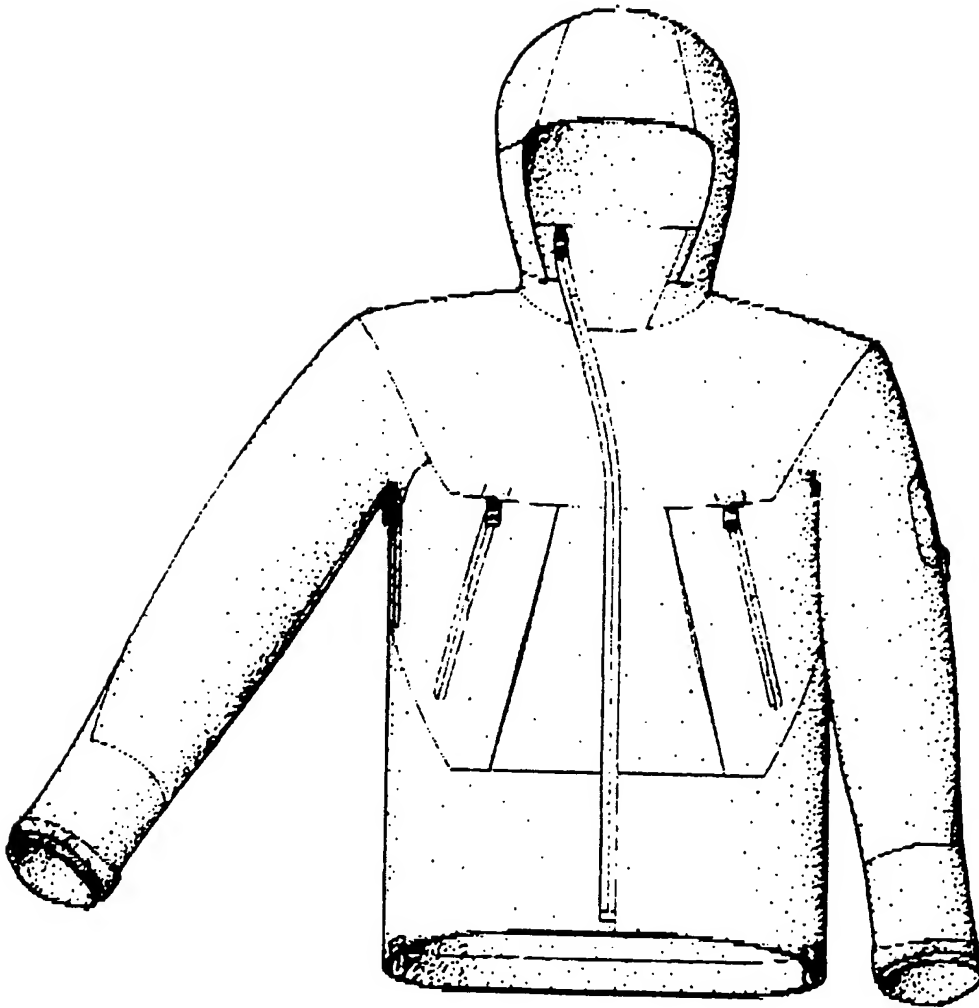


Figure 1

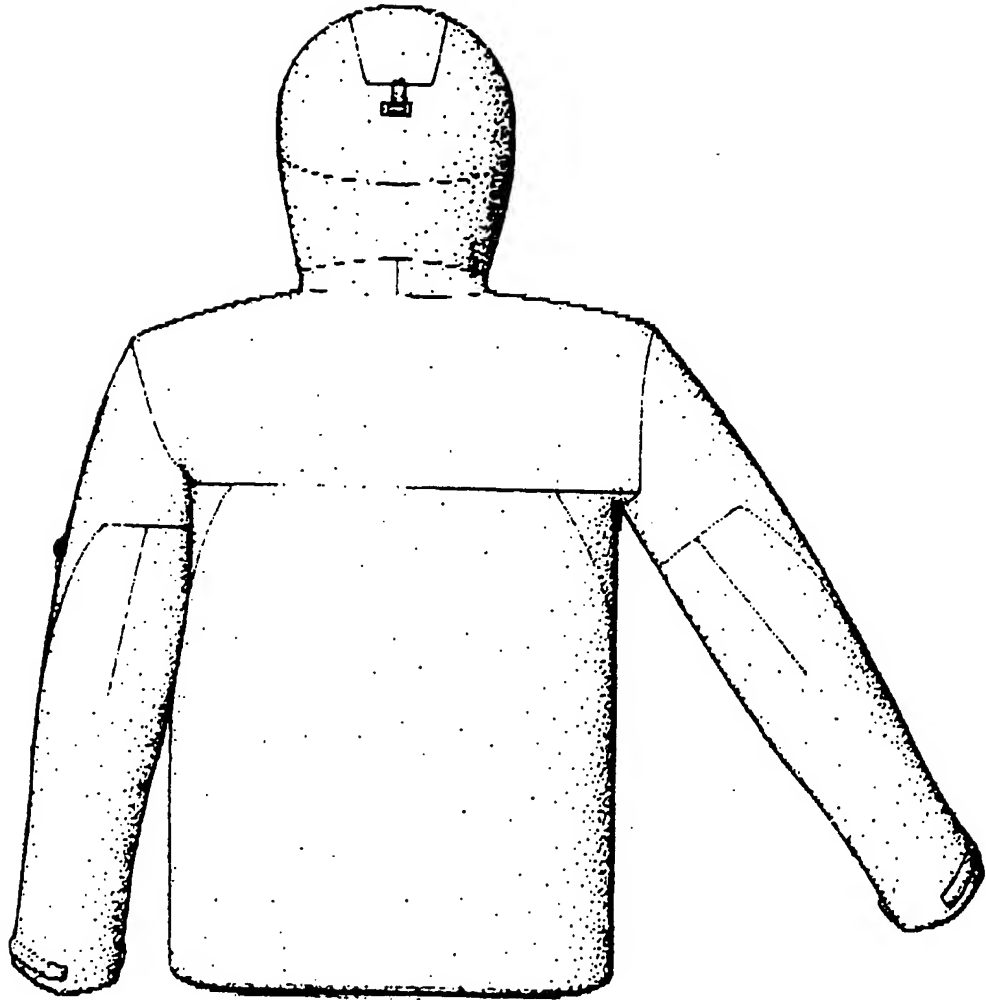


Figure 2

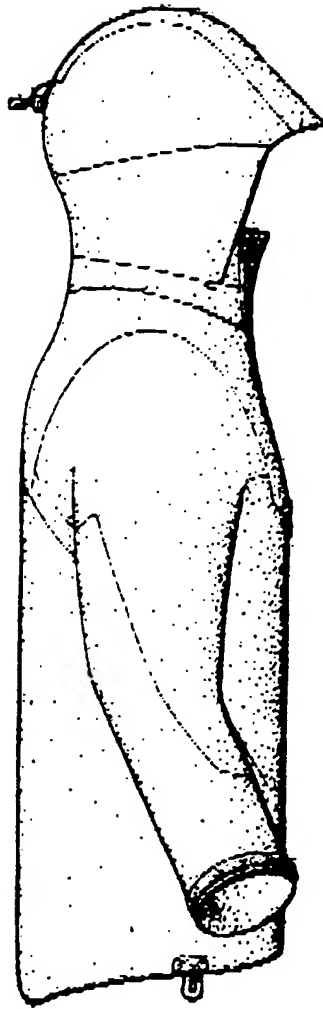


Figure 3

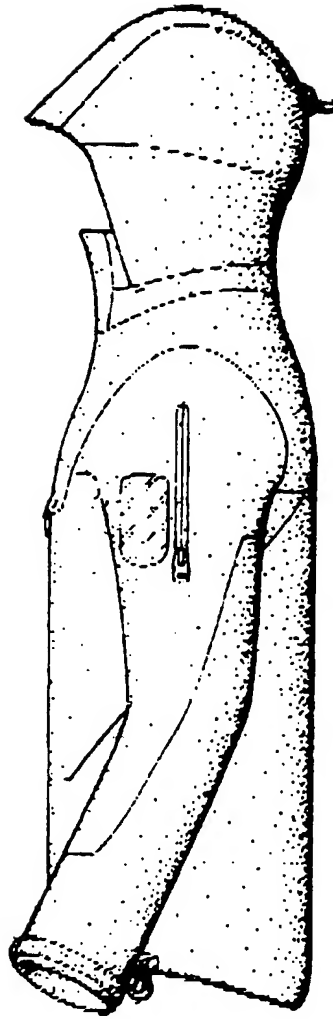


Figure 4

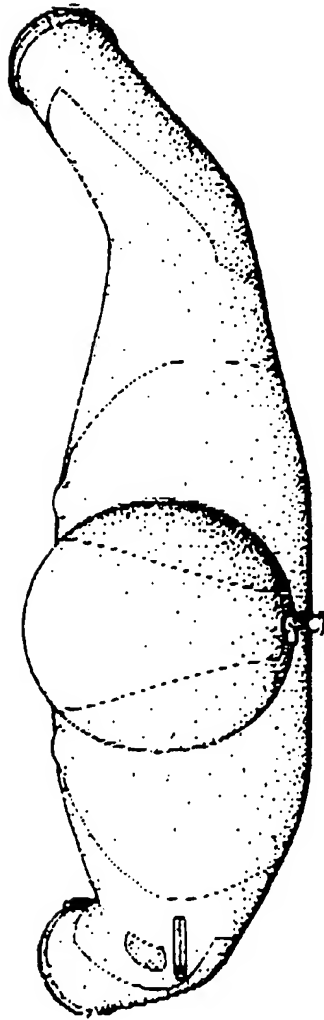


Figure 5

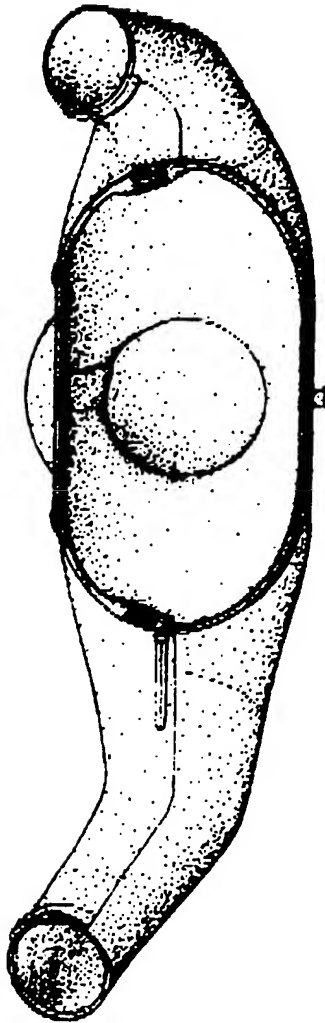


Figure 6

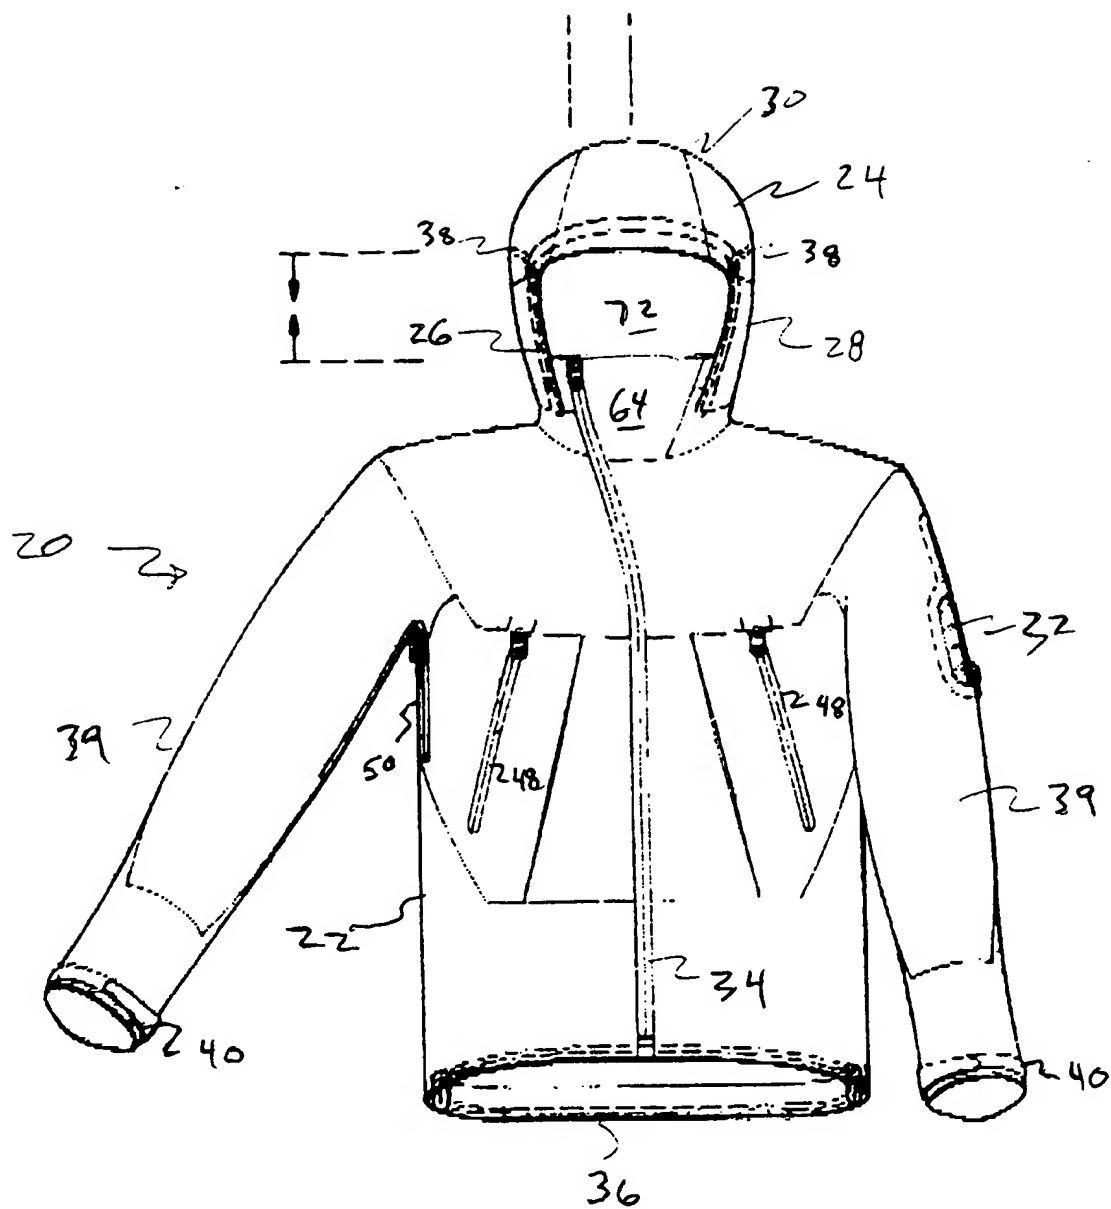


Figure 7

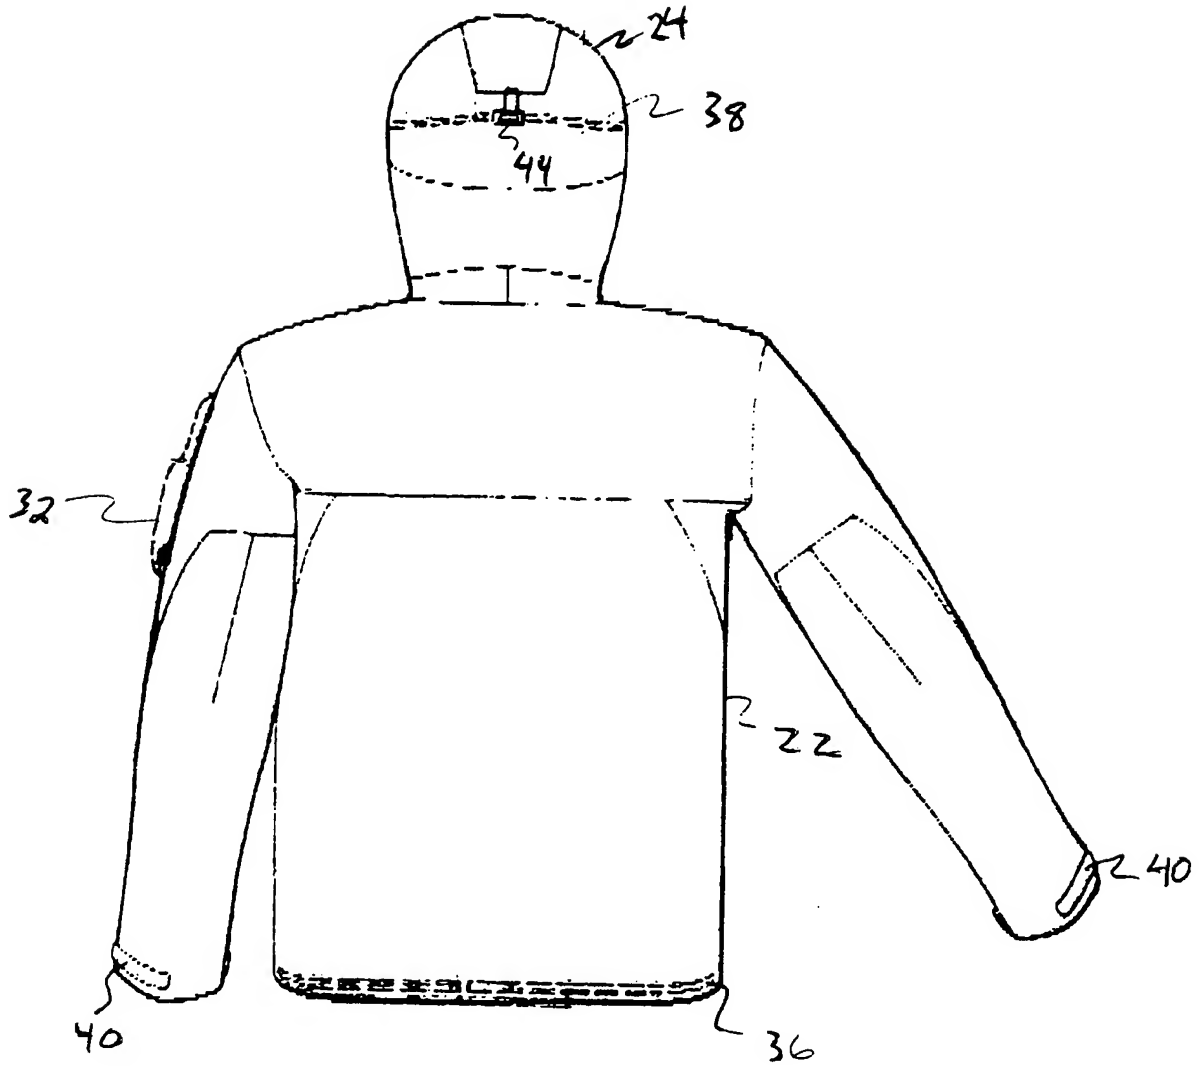


Figure 8

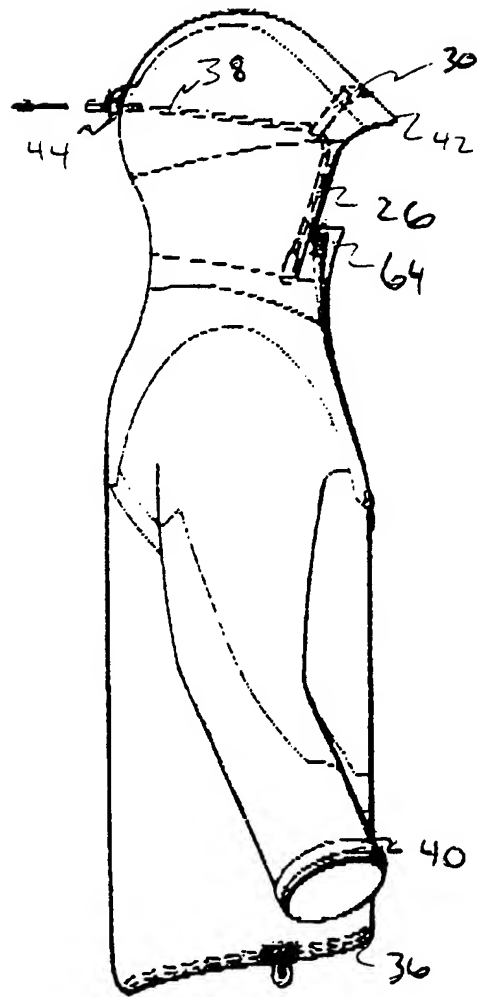


Figure 9

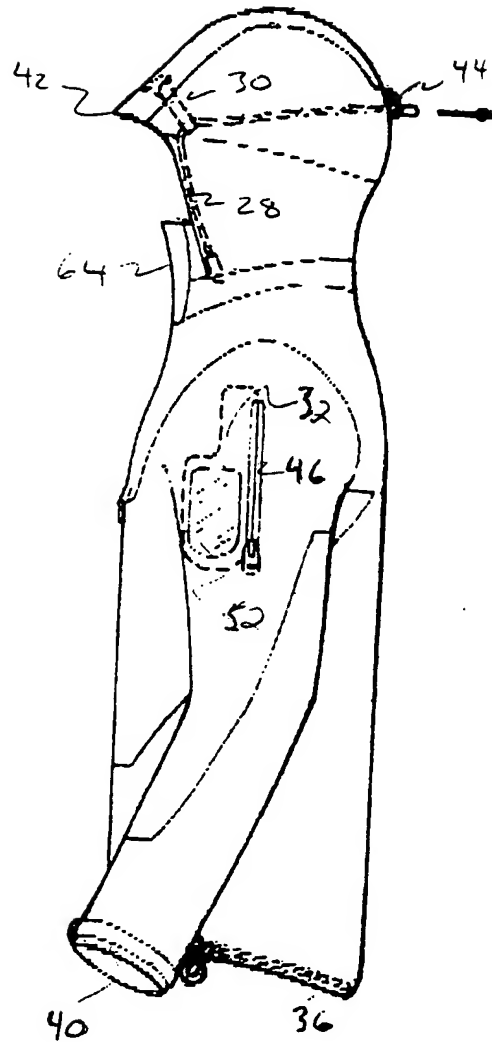


Figure 10

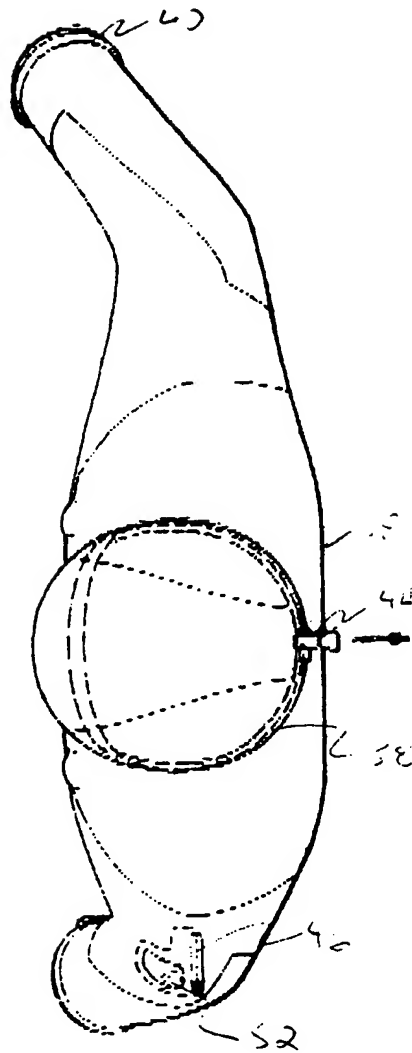


Figure 11

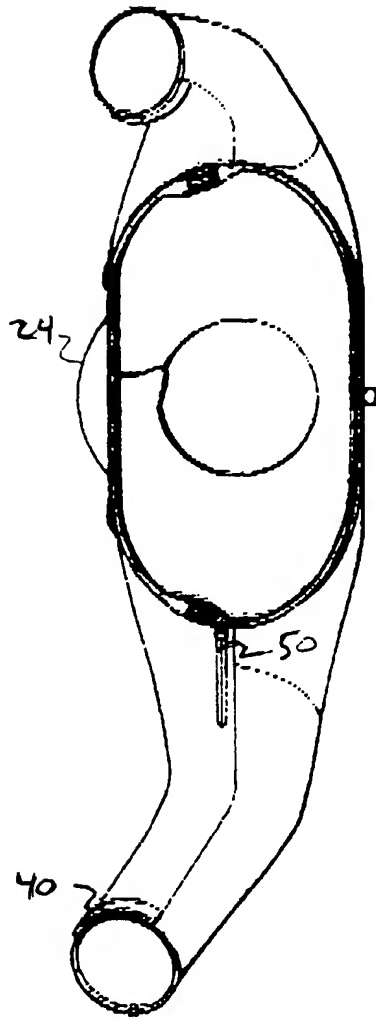


Figure 12

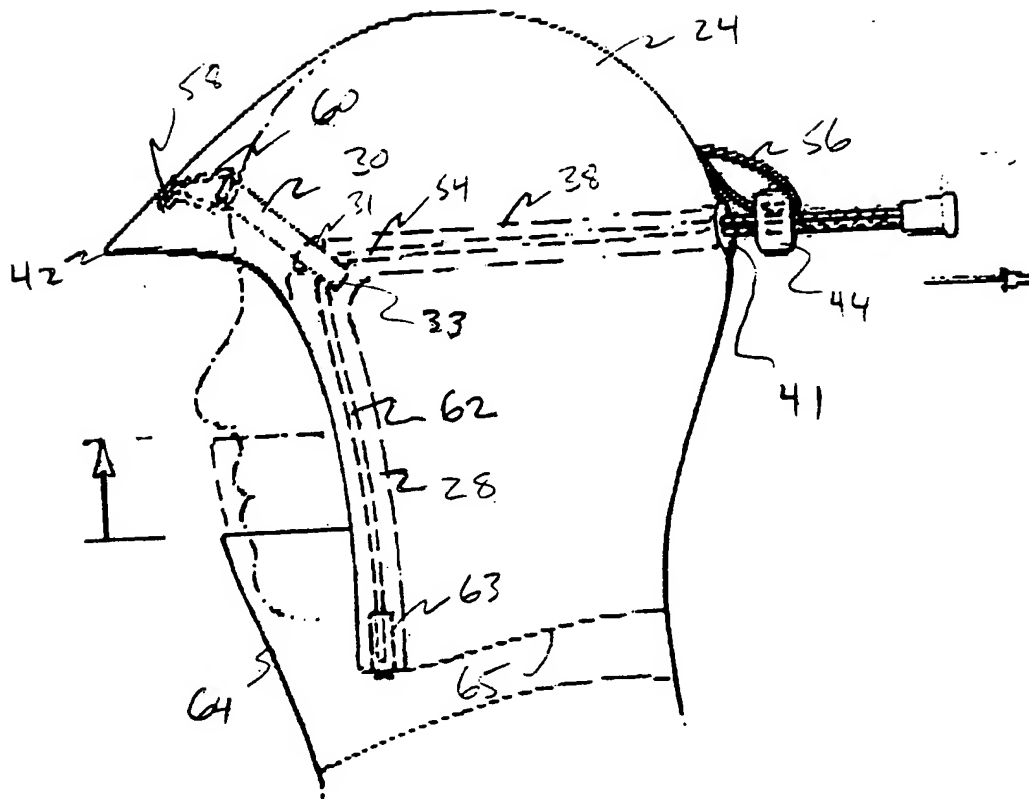


Figure 13

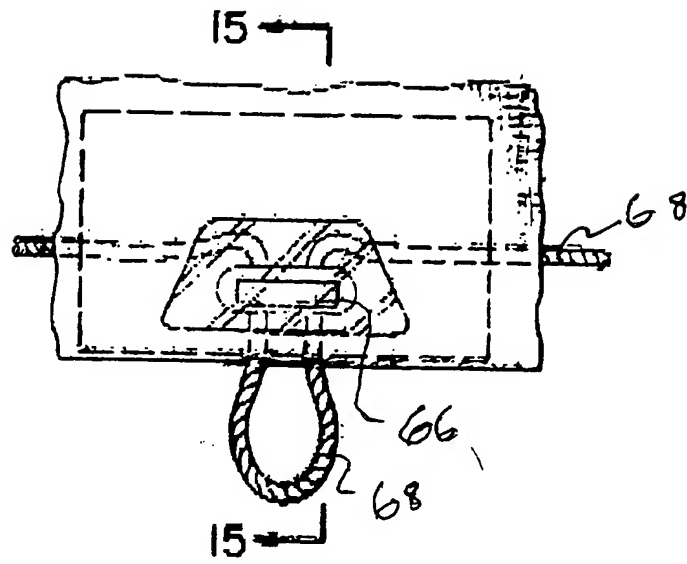


Figure 14

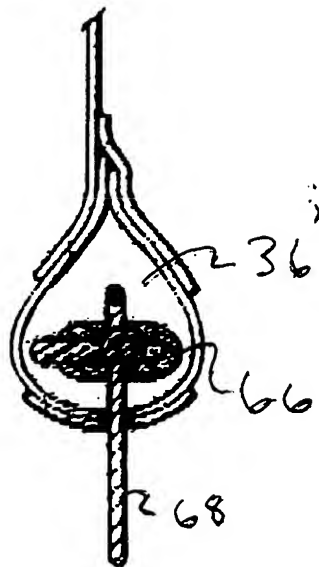


Figure 15

